

## Stainless Steel Spring Retractable Reels

### Air/Water/Oil - 3/8", 1/2", 3/4", 1" I.D

JARCH's stainless steel hose reels are ideal for food processing, pre-rinse, wash down, chemical transfer and industrial-solvent handling. Also suitable for coastal, offshore and on-board ship in marine applications where the harsh environment of salt water spray requires the use of stainless steel hose reels. Swivels include Viton® O-rings. Buna seals are available for water applications by adding a -B at the end of the model number.




5600 OLS



7800 OLS

#### Features:

- \* Full-flow stainless steel shaft and swivel assures maximum product delivery. Exception: Series 80000 only on OLS-S models.
- \* Heavy duty brackets eliminate bending due to angular hose pull.
- \* Nylon guide rollers reduce hose drag and abrasion.
- \* Vibration-proof self- locking fasteners assures assembly integrity.
- \* 304L stainless steel
- \* 500000 life revolving joint.

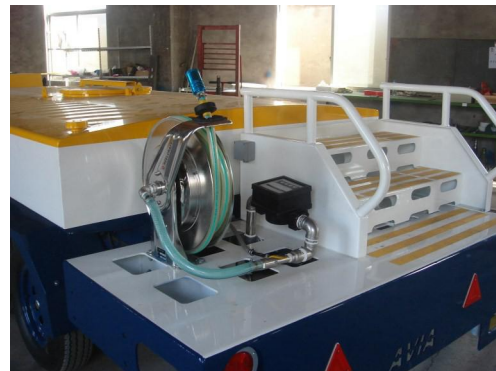

7800 OLS Application of airport drinking water vehicles

Model without hose & bumper	Shipping Weight		Hose I.D.		Hose O.D.		Hose Length		Pressure		NPT(F) Outlet	NPT(F) Inlet
	lbs	kg	in	mm	in	mm		m	psi	bar	in	in
Low and Medium Pressure Reels												
Maximum temperature 210 °F (99 °C)												
5600 OLS	22	10	3/8	10	.591	15	37	11	500	35	3/8	3/8
5600 OMS	25	11	3/8	10	.591	15	30	9	3000	207	1/2	1/2
7600 OMS55	42	19	3/8	10	.709	18	70	20	3000	207	3/8	3/8
7800 OLS	42	19	1/2	10	.750	19	50	15	500	35	1/2	1/2
7800 OMS	44	20	1/2	13	.866	22	50	15	3000	207	1/2	1/2
82000 OLS	82	37	1/2	13	.787	20	50	15	500	35	1/2	1/2
82000 OMS	84	38	1/2	13	.827	21	80	23	1500	104	1/2	1/2
83000 OLS	82	37	3/4	19	1.180	30	50	15	500	35	3/4	3/4
83000 OMS	84	38	3/4	19	1.180	30	50	15	1250	86	3/4	3/4
D83000 OLS	84	38	3/4	19	1.180	30	80	23	500	35	3/4	3/4
D84000 OLS	93	42	1	25	1.500	38	50	15	500	35	1	1

Note: stainless steel reel needs customized hose.